

virtus

Manuel Vivian



virtus

Manuel Vivian

Collezione composta da lampade a sospensione in alluminio in vari colori. Disponibile anche nella versione ad incasso. Sorgente luminosa a LED integrato dimmerabile.

Collection consisting of suspended lamps in aluminium, also in a recessed version. Available in several colours. Built-in dimmable LED light source.

GENERAL INFORMATION

COLOURS



white for white version matt white RAL 9016 wrinkled anthracite grey wrinkled / final black polished nickel anthracite grey wrinkled / final polished gold




anthracite grey for anthracite version rust brown for rust brown version white for recessed versions rust brown wrinkled / final black polished nickel rust brown wrinkled / final polished gold






E21011 2

kg 0,89 m³ 0,015

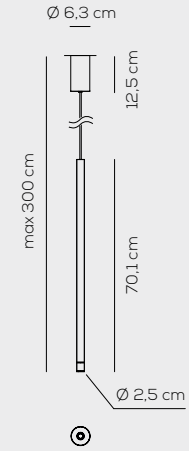

CE EAC ETL in progress



VIRTUS / LED 3,2W / DRIVER INCLUDED

Finish

07 matt white RAL 9016 wrinkled

10 anthracite grey wrinkled / final black polished nickel

11 anthracite grey wrinkled / final polished gold

12 rust brown wrinkled / final black polished nickel

13 rust brown wrinkled / final polished gold

1. 3000K*

2. 4000K available while stock last / fino ad esaurimento scorte

~295 lm* ~92 lm/W* source

220-240VAC

example composition code


E 2 101 1 11 1 2

optional accessories


E000700900 Kit decentramento bianco Ø 2,2 x 2 cm / White decentralization kit Ø 2,2 x 2 cm.

E2101 4

kg 0,89 m³ 0,015

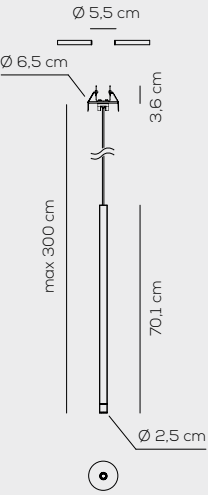

CE EAC ETL in progress



VIRTUS RECESSED / LED 3,2W / DRIVER NOT INCLUDED

Finish

07 matt white RAL 9016 wrinkled

10 anthracite grey wrinkled / final black polished nickel

11 anthracite grey wrinkled / final polished gold

12 rust brown wrinkled / final black polished nickel

13 rust brown wrinkled / final polished gold

1. 3000K*

2. 4000K available while stock last / fino ad esaurimento scorte

~295 lm* ~92 lm/W* source

350mA - 9Vdc

example composition code


E 2 101 1 11 1 2

foro - hole Ø 5,5 cm / profondità min - min depth 10 cm - Collegare in serie. / Wire in series.

E000700900	Kit decentramento bianco Ø 2,2 x 2 cm / White decentralization kit Ø 2,2 x 2 cm.
CEDLTC00100	on/off 350mA driver - Max 8W
CEDLTC00101	on/off 350mA driver - Max 12W
CEDLTC00102	dimmable 1-10V & PUSH 350mA driver - Max 6W
CEDLTC00103	dimmable 1-10V 350mA driver - Max 25W
CEDLTC00104	dimmable DALI 350mA driver - Max 25W
CEDLLG00302	on/off 350mA driver - Max 6W
CEDLLG00303	on/off 350mA driver - Max 12W

E21011 X

kg 0,89 m³ 0,015

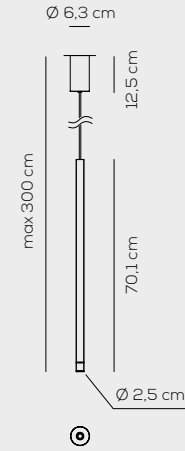

CE ETL in progress EAC in progress



VIRTUS / LED 6,5W / DRIVER INCLUDED

Finish

07 matt white RAL 9016 wrinkled

10 anthracite grey wrinkled / final black polished nickel

11 anthracite grey wrinkled / final polished gold

12 rust brown wrinkled / final black polished nickel

13 rust brown wrinkled / final polished gold

1. 2700K

2. 3000K*

3. 3500K

LED 6,5W

~671 lm* ~103 lm/W* source

220-240VAC

example composition code


E 2 101 1 11 1 X

optional accessories


E000700900 Kit decentramento bianco Ø 2,2 x 2 cm / White decentralization kit Ø 2,2 x 2 cm.

E2101 4 X

kg 0,89 m³ 0,015

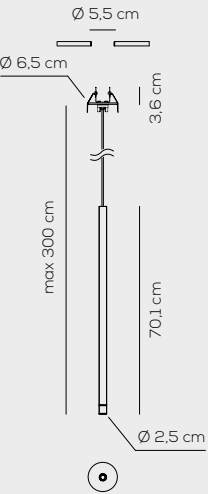

CE ETL in progress EAC in progress



VIRTUS RECESSED / LED 6,5W / COMPATIBLE WITH PIVOT SYSTEM / DRIVER NOT INCLUDED

Finish

07 matt white RAL 9016 wrinkled

10 anthracite grey wrinkled / final black polished nickel

11 anthracite grey wrinkled / final polished gold

12 rust brown wrinkled / final black polished nickel

13 rust brown wrinkled / final polished gold

1. 2700K

2. 3000K*

3. 3500K

LED 6,5W

~671 lm* ~103 lm/W* source

700mA - 9,2Vdc

example composition code

E 2 101 4 11 1 X

foro - hole Ø 5,5 cm / profondità min - min depth 10 cm - Collegare in serie. / Wire in series.

E000700900	Kit decentramento bianco Ø 2,2 x 2 cm / White decentralization kit Ø 2,2 x 2 cm.
CEDLTC00124	dimmable Phase Cut 700mA driver - Max 20W trailing and leading edge
CEDLTC00127	dimmable 0/1 - 10V - Push - 700mA driver - Max 9W
CEDLTC00126	dimmable DALI 700mA driver - Max 20W
CEDLTC00104	dimmable DALI 700mA driver - Max50W