

# PANZERI

## Golden Ring

220-240V AC dimmable (DALI/Push DIM)

L08121.180.0402



gold leaf




### Data sheet

CODE	L08121.180.0402
SYSTEM POWER CONSUMPTION	220W
EFFICACY	71.36lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	31432lm
LUMEN OUTPUT	15699lm
EFFICIENCY	49.9%
WEIGHT	22,51 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS (CM)	203,0 x 25,0 x 203,0




Suspension lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in polyacrylic paint. Aluminium dissipation plates. Aluminium and pickled sheet metal covers in white or black polyacrylic paint, or with gold leaf coating. Diffusers in modelled polycarbonate with opaline finish. Suspension kit with griplocks and 5m (196,9") long steel cables. 5m (196,9") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint, or with gold leaf coating.

### Technical drawing

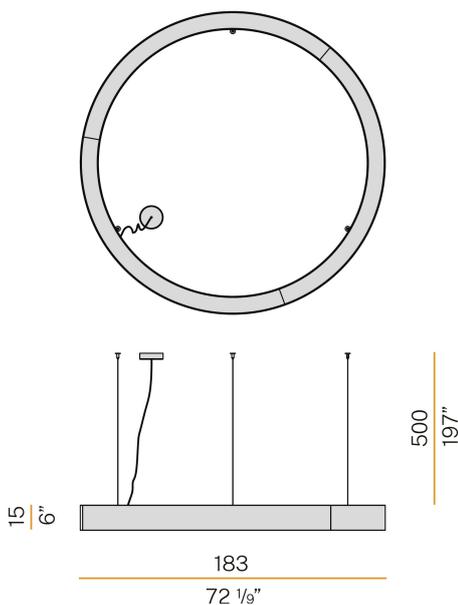

### Polar diagram

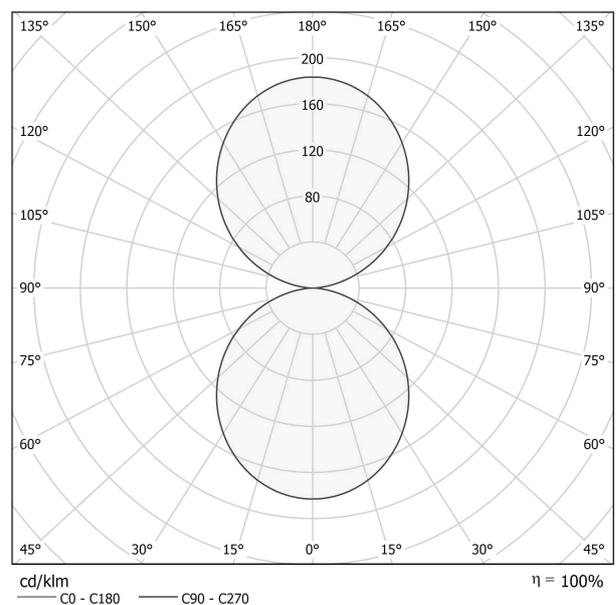

# PANZERI

## Golden Ring

### Accessories / canopy

---

M8121-3

Canopy for power supply and to join 3 steel cables.

